
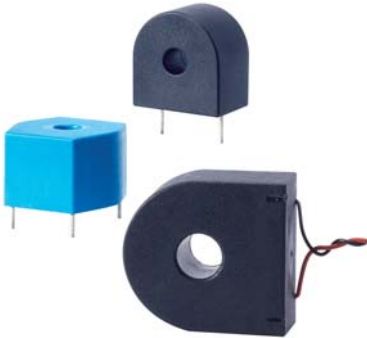



## Current transformer/電流互感器

	<p><b>Core shape: Ring type</b> <b>Features:</b></p> <ul style="list-style-type: none"> <li>•Designed with the high permeability Nano-crystalline core</li> <li>•Completed potting process</li> <li>•Wall thickness meets safety standards</li> <li>•Different turn ratio</li> <li>•RoHS Compliant</li> </ul>	<p><b>磁芯形狀：環形</b> <b>特性：</b></p> <ul style="list-style-type: none"> <li>•採用高磁導率納米晶磁芯設計</li> <li>•採用完全灌封工藝</li> <li>•壁厚符合安全標準</li> <li>•各種不同的圈數比例</li> <li>•符合RoHS標準</li> </ul>
---	---	--

### Shape and external dimension/機械尺寸mm.

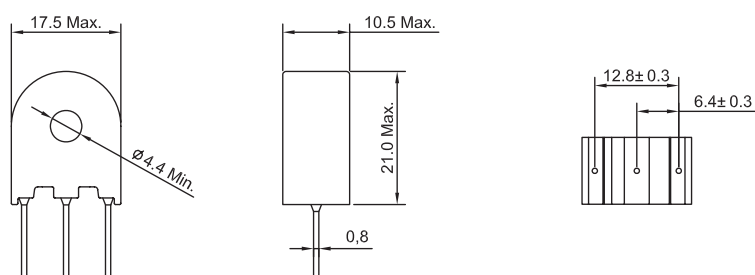

### Typical application/典型應用

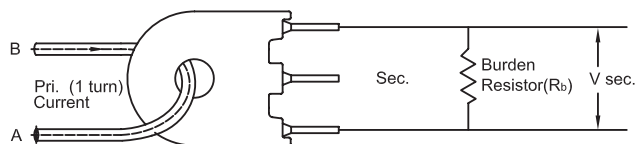

$$R_b = \frac{V_{sec.} \cdot N_{sec.}}{Pri. \text{ current}}$$

### Electronical characteristics/電氣特性

Model/型號	Turn ratio Np : Ns	Inductance Sec. @1KHz/50mv (mH)	DCR(Ω) (Max.)	Voltage-time V . us	Burden Resistance. Rb Ω
GBCT-1:50-T	1:50	5	0.7	149	1.4
GBCT-1:100-T	1:100	20	1.4	298	2.9
GBCT-1:200-T	1:200	80	4.5	596	5.7
GBCT-1:750-T	1:750	1125	62.0	2235	21.4